

TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPR 55/65 D, BPR 60/65 D



Maximum longevity

Full protection hood - engine and components protected all around



Precise and save to operate

BOMAG single lever control




Higher quality, lower costs

ECONOMIZER - The compaction display (optional)

Shipping dimensions in m3

BPR 55/65 D 0,873
BPR 60/65 D 0,873

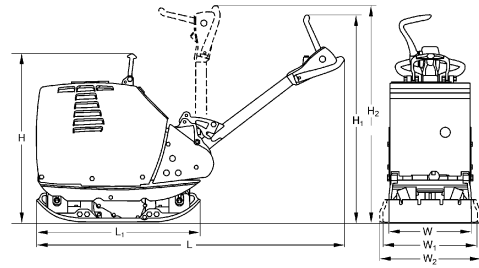

Standard Equipment

- Engine protection hood
- Single lever control
- Low vibration steering rod
- Height adjustable steering rod
- Steering rod lockable in transport and working position
- Vibration and throttle regulation on the steering rod
- Highly wear resistant base plate
- Automatic decompression
- Multi-functional, foldable single-point lifting facility
- Extension plates (650mm)
- Electric starter
- Recoil starter
- Back-up drive protection
- Warning signal at low oil level (BPR55/65D)
- 3-2-1 Warranty
- Hour meter

Optional Equipment

- ECONOMIZER (+5kg)
- Tool kit
- Special painting
- Plastic mat
- Extension plates (550/750mm)
- Service Kit
- US Version EPA 4 NRTC (BPR60/65D)
- TOUGH WARRANTY

Dimensions in mm

	H	H1	H2	L	L1	W	W1	W2
BPR 55/65 D	790	980	1350	1700	900	450	650	750
BPR 60/65 D	790	980	1350	1700	900	450	650	750

Technical Data

Weights

		BOMAG BPR 55/65 D	BOMAG BPR 60/65 D
Operating weight CECE (W)	kg	435	440
Operating weight CECE (W1)	kg	455	460
Operating weight CECE (W2)	kg	466	471
Basic weight	kg	450	455

Dimensions

		BOMAG BPR 55/65 D	BOMAG BPR 60/65 D
Basic working width	mm	650	650
Working width without extension bars (W)	mm	450	450
Lowest passing height	mm	790	790
Min. height w. steering in top position	mm	980	980
Max. height w. steering in top position	mm	1.220	1.220

Driving Characteristics

		BOMAG BPR 55/65 D	BOMAG BPR 60/65 D
Working speed, max.	m/min	28	28
Max. gradeability (dep. on soil con.)	%	35	35

Drive

		BOMAG BPR 55/65 D	BOMAG BPR 60/65 D
Engine manufacturer		Lombardini	Hatz
Type		15 LD 440	1B 40
Emission stage		non EPA	non EPA
Cooling		air	air
Number of cylinders		1	1
Performance ISO 3046	kW	6,8	6,7
Speed	min-1	3.000	3.000
Drive system		mech. diesel	mech. diesel
Fuel		1,4	1,5
Fuel comsump. aver. during operation	l/h	1,4	1,5

Exciter system

		BOMAG BPR 55/65 D	BOMAG BPR 60/65 D
Frequency	Hz	66	66
Centrifugal force	kN	55	60
Amplitude	mm	1,85	1,96

Capacities

		BOMAG BPR 55/65 D	BOMAG BPR 60/65 D
Fuel	l	5,0	5,0

Technical modifications reserved. Machines may be shown with options.

