


Subsea Shear (GSS)

FEATURES

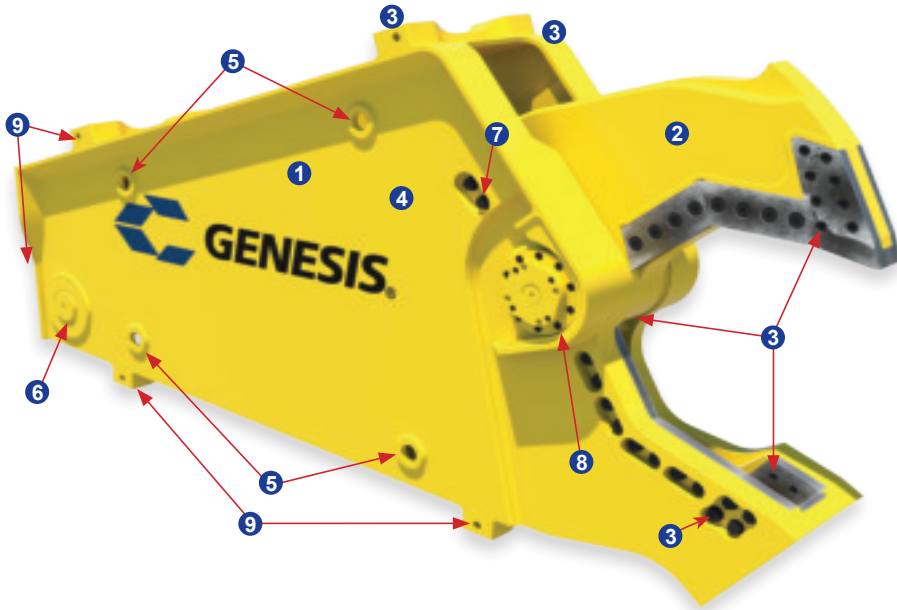

- 1 Pressure tested to operate at depths down to 10,000 feet
- 2 Anti-corrosion primer and paint for supreme protection in harsh marine environments
- 3 Xylan[®] anti-corrosion coated fasteners and critical surfaces
- 4 Zinc anodes for galvanic corrosion protection
- 5 Holes for easy draining and flushing
- 6 Sealed, greaseable pivot points
- 7 Exclusive easy to shim AutoGuide system helps maintain blade tolerances by off-setting jaw deflection
- 8 Heavy-duty pivot design protected by an anti-corrosion coating provides structural strength and long-term durability
- 9 Multi-position rigging to hang and operate while suspended by a cable crane

APPLICATIONS

- Offshore Platform Decommissioning
- Offshore Pipeline and Piling Cutting
- Underwater Steel Cutting
- Cable Hung - Operated by Subsea Power Pack or from Surface Power

Model Number	Weight (lbs.)	Jaw Opening (ins.)	Jaw Depth (ins.)
GSS 660	13,300	32	32
GSS 2500	41,000	46	48

Genesis GSS shears are covered by a 12-month, 1,500-hour (whichever occurs first) warranty. Genesis reserves the right to continually make product improvements designed to positively enhance performance. Patents: genesisattachments.com/patents

Xylan is a registered trademark of Whitford Corporation.