




WARRIOR 1200

The Powerscreen Warrior 1200 is the most compact 12ft scalping screen in today's market. Despite this footprint, with a highly aggressive screen at its heart, the Warrior 1200 is not overshadowed by its competition. Building on the success of the smaller 600 model, the Warrior 1200 boasts excellent service access, high capacity and a low cost of ownership. A multipurpose heavy duty incline two deck screen, the Warrior 1200 is capable of stockpiling, scalping before and after crushing units, or as a standalone unit. Its highly aggressive screen can accept bofor bars, finger screens, woven mesh and punch plates along with other application specific media types.

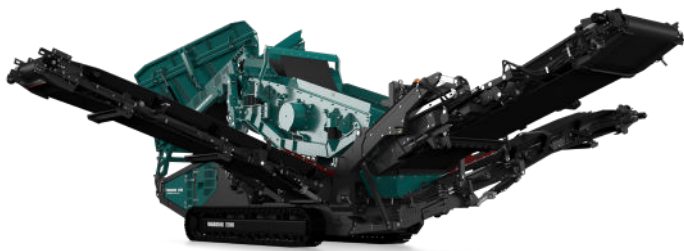

✓ APPLICATIONS

AGGREGATE



Sand & gravel
Blasted rock
River rock

RECYCLING



Top soil
C&D waste
Composted materials

MINING



Processed ores
Processed minerals

www.powerscreen.com



TECHNICAL HIGHLIGHTS ✓

INCREASED PRODUCTIVITY



- Heavy duty incline screenbox with adjustable stroke & speed
- Maximum mobility with heavy duty, low ground pressure tracks
- High performance hydraulic system - cast iron pumps & motors complete with hydraulic cooler
- Ultra low fuel consumption with optimised hydraulics

VERSATILITY

- Versatile unit for 3 way splitting, stockpiling or scalping before or after a crusher
- Smart design minimises weight but retains strength and robustness

SERVICEABILITY

- Simple to operate & maintain
- Power unit featuring a longitudinal engine arrangement to aid access & serviceability





TECHNICAL SPECIFICATION



1 HOPPER

Capacity: 5m³ (6.5yds³)

2 FEED CONVEYOR

Width: 1000mm (40")
Heavy duty belt feeder

3 SCREENBOX

2 Bearing, double deck screenbox
Size: 3.68m x 1.17m (12' x 4')
High aggression

4 SIDE CONVEYOR (MIDSIZE)

Width: 650mm (26")
Discharge height: 2.95m (9'8")

5 TAIL CONVEYOR (OVERSIZE)

Width: 1000mm (40")
Discharge height: 2.8m (9'2")
Folds for transport

6 TRACKS

Width: 300mm (1')

7 POWER UNIT

Tier 3/Stage 3A:
Deutz D2011 L04I - 49.4kW (66.2hp)
Tier 4/Stage 4:
Caterpillar C2.2 55kW (74hp)
Stage V:
Caterpillar C2.2 55kW (74hp)
Fuel tank capacity: 145 L (38 US Gal)

8 SIDE CONVEYOR (FINESIZE)

Width: 800mm (32")
Discharge height: 3.35m (11')



DIMENSIONS



Transport

Length: 10.96m (36')
Width: 2.25m (7' 5")
Height: 2.51m (8' 3")

Weight

17,150kg (37,809lbs)

GET IN TOUCH

Dungannon

200 Coalisland Road, Dungannon,
Co Tyrone, BT71 4DR, Northern Ireland
Tel: +44 (0) 28 87 718 500
Fax: +44 (0) 28 87 747 231

Louisville

11001 Electron Drive,
Louisville, Kentucky, 40299 USA
Tel: +1 502 736 5200
Fax: +1 502 736 5202



www.powerscreen.com

The material in this document is for information only and is subject to change without notice. Powerscreen assumes no liability resulting from errors or omissions in this document, or from the use of the information contained herein. Due to continual product development we reserve the right to change specifications without notice. Product performance figures given in this brochure are for guidance purposes only, this information does not constitute an expressed or implied warranty or guarantee, but shows test examples provided by Dealers. These results will vary depending on crusher chamber settings, screen media and sizes, feed source and types of material being processed. Photographs are for illustrative purposes only, some or all of the machines in the illustrations may be fitted with optional extras. Please check with your Dealer for details on optional extras. All machines are CE Approved.

Powerscreen® is a registered trademark of Terex GB Limited in the United States of America and many other countries. Copyright 2024 Terex GB Limited. Published and Printed in 2024.