




WARRIOR 1800X

Designed for medium to large operators, where high capacity and throughput are paramount, the Powerscreen® Warrior 1800X is a tough, heavy duty machine built for screening, 2 or 3 way splitting and stockpiling in quarrying, recycling, construction and demolition aggregates and top soil applications.

The versatile screen accepts a wide range of media options including bofor bars, finger screens, woven mesh and punch plates. An optional apron feeder is also available for the Warrior 1800X.

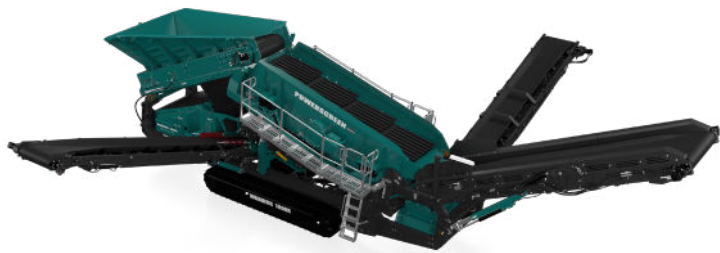

✓ APPLICATIONS

AGGREGATE



Sand & gravel
Blasted rock
River rock

RECYCLING



Top soil
C&D waste
Composted materials
Wood by-products
Overburden
Foundry waste

MINING



Processed ores
Processed minerals

www.powerscreen.com



TECHNICAL HIGHLIGHTS ✓



INCREASED PRODUCTIVITY

- High capacity up to 625 tph / 689 US tph
- Low engine running speed to improve fuel consumption.
- Rapid set up time - typically under 10 minutes.
- Class leading belt widths helps to maximise throughput.



VERSATILITY

- Suitable for scalping or stockpiling as a 3 way split or 2 way split machine
- Prepared to accept a Powerscreen Warrior 2100 Spaleck recycling screenbox
- Dual power option
- Load sensing hydraulics prevent stalling, thus reducing downtime




SERVICEABILITY

- Jack-up screen facility for access to screen media & underscreen conveyor
- Underscreen conveyor raise feature for conveyor & diesel tank access



TECHNICAL SPECIFICATION

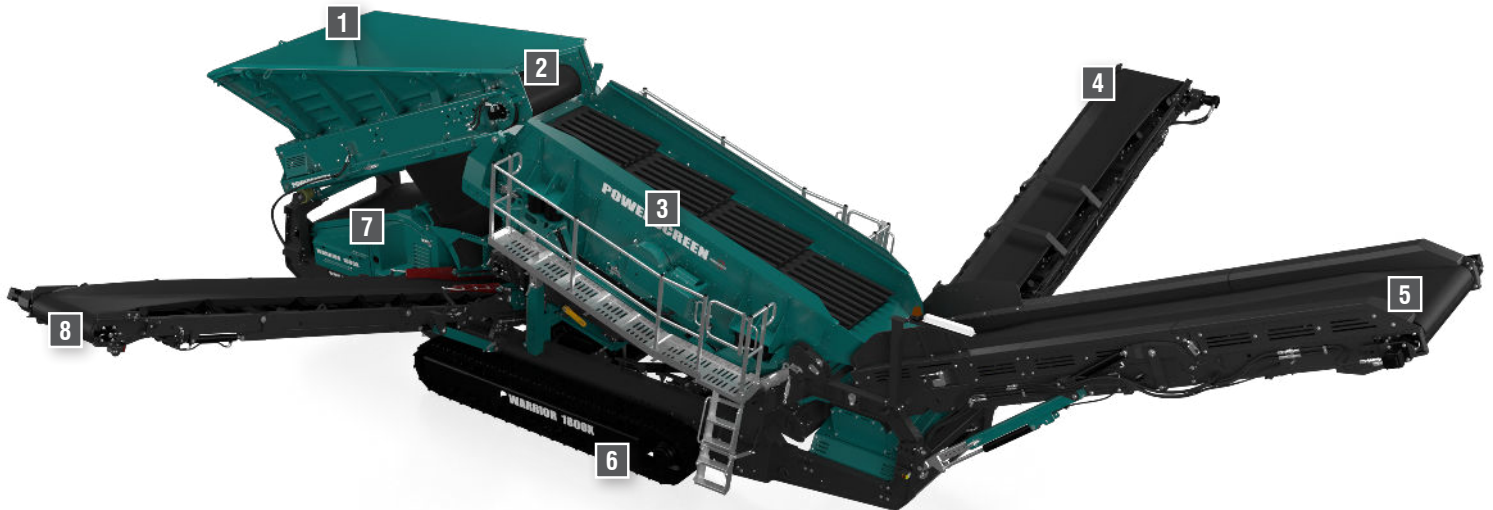

1 HOPPER

Capacity: 7m³ (9.2 cu. yd.)
Hydraulic folding wing plates
Collapsible rear wall for direct feeding

2 FEED CONVEYOR

Width: 1300mm (52")
Heavy duty belt feeder
Super grip drive drum
Variable speed control

3 SCREENBOX

Heavy duty 2 deck screenbox with adjustable screening range
Size: 4.88m x 1.56m (16' x 5')
Adjustable screen angle 14° - 18°

4 SIDE CONVEYOR (FINESIZE)

Width: 900mm (36")
Discharge height: 4.08m (13' 5")
Variable speed control

5 TAIL CONVEYOR (OVERSIZE)

Width: 1400mm (56")
Discharge height: 4.2m (13' 9")
Heavy duty impact bars
Variable speed control
Angle adjustable 0° - 24°

6 TRACKS

Width: 400mm (1' 4")
2 Speed tracking

7 POWER UNIT

Engine Tier 3 Equivalent: Caterpillar C4.4 - 4 90kW (121hp) @ 1800rpm
Engine Tier 4F / Stage V: Deutz 3.6 - 4 92kW (123hp) @ 1800rpm
Fuel tank capacity: 336 L (89 US Gal)

8 SIDE CONVEYOR (MIDSIZE)

Width: 900mm (36")
Discharge height: 3.81m (12' 6")
Variable speed control



DIMENSIONS

WORKING



16.1m (52' 10")

4.79m (15' 9")



13.59m (44' 7")

4.79m (15' 9")

TRANSPORT

Length: 15.99m (52' 5")
Width: 2.97m (9' 9")
Height: 3.43m (11' 3")

WEIGHT*

Total Weight: 35,000kg (77,162lbs)
*Weights may vary depending on options

GET IN TOUCH

Dungannon
200 Coalisland Road, Dungannon,
Co Tyrone, BT71 4DR, Northern Ireland
Tel: +44 (0) 28 87 718 500
Fax: +44 (0) 28 87 747 231

Louisville
11001 Electron Drive,
Louisville, Kentucky, 40299 USA
Tel: +1 502 736 5200
Fax: +1 502 736 5202



www.powerscreen.com

The material in this document is for information only and is subject to change without notice. Powerscreen assumes no liability resulting from errors or omissions in this document, or from the use of the information contained herein. Due to continual product development we reserve the right to change specifications without notice. Product performance figures given in this brochure are for guidance purposes only, this information does not constitute an expressed or implied warranty or guarantee, but shows test examples provided by Dealers. These results will vary depending on crusher chamber settings, screen media and sizes, feed source and types of material being processed. Photographs are for illustrative purposes only, some or all of the machines in the illustrations may be fitted with optional extras. Please check with your Dealer for details on optional extras. All machines are CE Approved.

Powerscreen® is a registered trademark of Terex GB Limited in the United States of America and many other countries. Copyright 2023 Terex GB Limited. Published and Printed in November 2023.